


3.2 CARROZZE FINALI

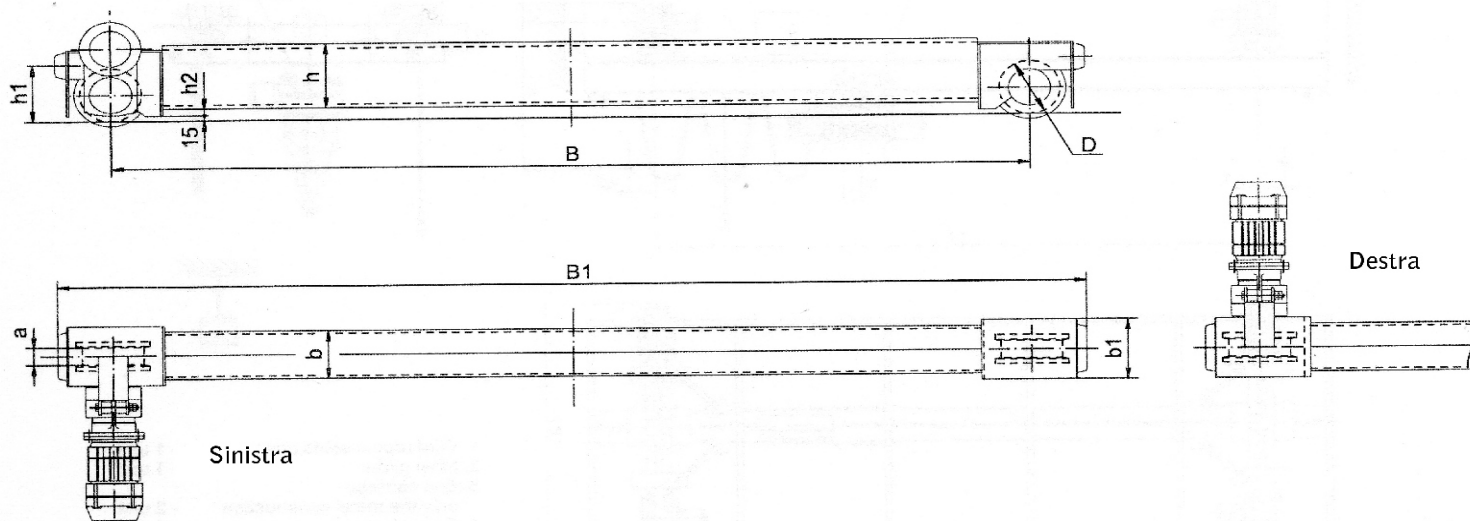

Designazione	Portata Q	Spanna Lk	Velocità	Motoriduttore		Dimensioni								
				Tipo	Potenza	D	B	B1	a	b	b1	h	h1	h2
-	t	m	m/min	-	kW	mm								
MEA 02-00	1	7.5	20/6	TP1160-35 T80A-12/4	0.08/0.25	160	1600	1938	55	116	240	140	160	60
MEA 02-01		10.5					2000	2338		128		160		40
MEA 02-02		13.5					2700	3038		140		180		20
MEA 02-03		16.5					3000	3338		152		200		35
MEA 02-04	2	7.5	20/6	TP1160-35 T80B-12/4	0.12/0.37	160	1600	1938	55	128	240	160	160	40
MEA 02-05		10.5					2000	2338		140		180		20
MEA 02-06		13.5					2700	3038		164		220		20
MEA 02-07		16.5					3000	3338		164		220		20
MEA 02-08	3.2	7.5	20/6	TP1200-35 T90S-12/4	0.18/0.55	160	1600	1938	55	152	240	200	160	40
MEA 02-09		10.5					2000	2338		164		220		30
MEA 02-10		13.5					2700	3038		180		240		40
MEA 02-11		16.5					3000	3338		190		270		40
MEA 02-12	5	7.5	20/6	TP1200-35 T90S-12/4	0.18/0.55	160	1600	1938	55	164	240	220	160	30
MEA 02-13		10.5					2000	2338		180		240		30
MEA 02-14		13.5					2700	3038		190		270		20
MEA 02-15		16.5					3000	3338		200		300		20
MEA 02-16	6.3	7.5	20/6	TP1250-46 T90S-12/4	0.18/0.55	200	1600	1978	65	164	270	220	200	30
MEA 02-17		10.5					2000	2378		180		240		50
MEA 02-18		13.5					2700	3078		200		300		30
MEA 02-19		16.5					3000	3378		200		300		30
MEA 02-20	8	7.5	20/6	TP1250-46 T90S-12/4	0.18/0.55	200	1600	1978	65	180	270	240	200	50
MEA 02-21		10.5					2000	2378		190		270		30
MEA 02-22		13.5		TP1250-54 T90S-12/4	0.18/0.55	250	2700	3196		210		330	250	40
MEA 02-23		16.5					3000	3496		220		360		30
MEA 02-24	10	7.5	20/6	TP1250-54 T90S-12/4	0.18/0.55	250	1600	2096	65	220	324	360	250	30
MEA 02-25		10.5					2000	2496		220		360		30
MEA 02-26		13.5					2700	3196		230		400		30
MEA 02-27		16.5					3000	3496		230		400		30